



EZ-IP

Surveillance Made Simple

EASY AND AFFORDABLE IP SOLUTION

Powered by Dahua



IP doesn't have to mean complex and costly.

EZ-IP delivers entry level IP products with outstanding performance and simplicity.

EZ-IP is perfect for small to medium size applications like home/residential security, small retail shops, and other typical SMB applications. At the same time, EZ-IP offers a perfect alternative to migrate from analog to an IP system with its easy-to-use nature and cost effectiveness.

EZ-IP includes IP camera and NVR products that support real-time monitoring, video storage, and playback.

EZ-IP products are fully in line with Dahua's quality. Stable and reliable components are utilized and various tests such as anti-vibration, water resistance, and aging tests are performed to ensure Dahua quality standards.



Key Features

Smart H.265+

Smart H.265+ is an optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure, and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

■ 24 hour continuous recording (1080P@25fps)



Outdoor


	H.264	H.265	Smart H.265+
Storage Size	43.5GB	22GB	4.94GB
Average Bitrate	4135Kbps	2092Kbps	470Kbps
Saving (VS. H.264)	--	49.4%	88.6%
Saving (VS. H.265)	--	--	77.5%



Darkroom Color

	H.264	H.265	Smart H.265+
Storage Size	36.8GB	20.7GB	0.97GB
Average Bitrate	3575Kbps	2011Kbps	94Kbps
Saving (VS. H.264)	--	43.75%	97.3%
Saving (VS. H.265)	--	--	95.3%

■ How many days of full-HD footage can a **4TB HDD** store?

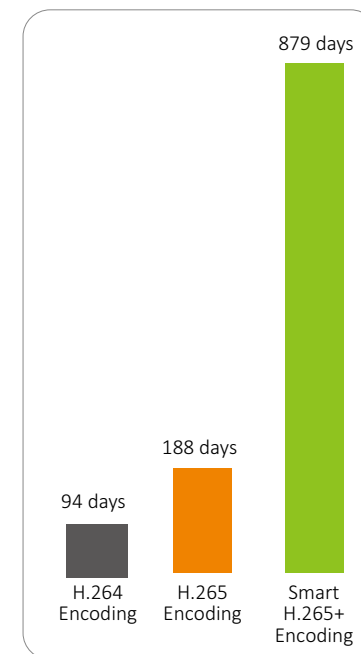

Indoor

	H.264	H.265	Smart H.265+
Storage Size	43.8GB	21.46GB	4.38GB
Average Bitrate	4260Kbps	2087Kbps	426Kbps
Saving (VS. H.264)	--	51%	90%
Saving (VS. H.265)	--	--	79.6%



Darkroom B/W

	H.264	H.265	Smart H.265+
Storage Size	34.4GB	20.7GB	0.7GB
Average Bitrate	3342Kbps	2012Kbps	68Kbps
Saving (VS. H.264)	--	39.8%	98%
Saving (VS. H.265)	--	--	96.6%


*The above figures are based on real test conditions and the bit rate reduction may vary depending on lighting and movement conditions within the scene.

Key Features

P2P


No DDNS setting, no port mapping, just scan SN QR code and connect to mobile phone.

Live view, playback and real-time alerts from mobile phone.

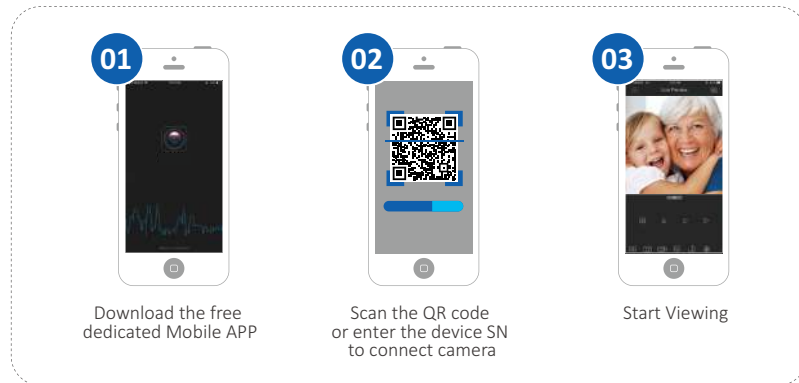


Quick Start

2MP cameras feature a new platform that saves on storage and employs a fast boot and special processing scheme, increasing startup speed by more than 50%.

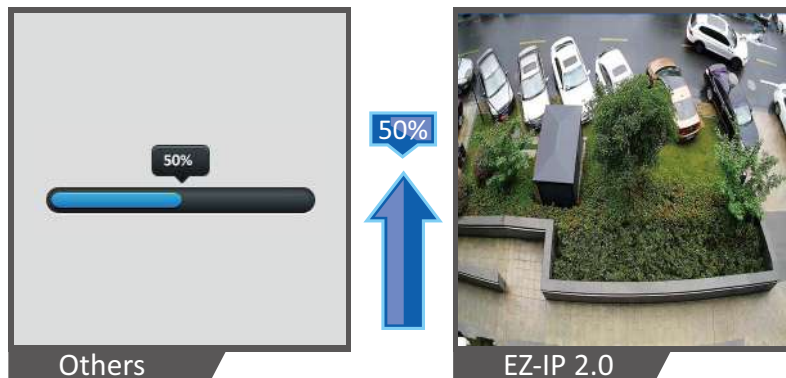

Plug & Play

Easy and simple operation is one of the important features customers care about. EZ-IP cameras all feature PoE, enabling users to simply plug & play with PoE NVRs.

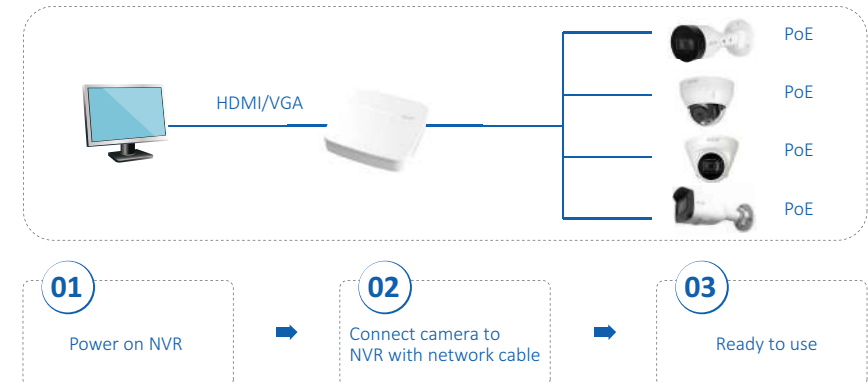

Smart Decode

EZ-IP NVR supports Smart Decode, with that system can automatically calculate decoding capacity and freely show main/sub stream live view.



Key Features


2MP & 4MP Resolution

EZ-IP offers 2MP & 4MP resolution cameras to cater to the needs of home/residential and SMB applications.



Face Optimization

EZ-IP optimizes facial images, helping users identify persons of interest with clearer, more detailed portraits.

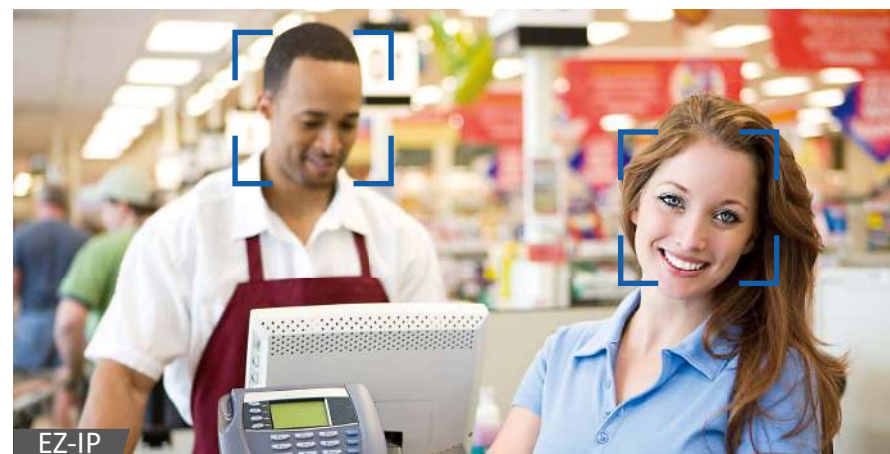

Larger FOV

Compared with traditional lens windows, a quadrangular window design can support a larger FOV with same sensor and lens.



■ Innovative Lens Window Design



Weatherproof Design

EZ-IP cameras feature an IP67 weatherproof design, allowing them to be used in outdoor applications (except for indoor cameras).



NETWORK CAMERAS

	Vari-Focal Bullet			Vari-Focal Turret
Model	IPC-B2B40-ZS	IPC-B2B20-ZS	IPC-B2B20-L-ZS	IPC-T2B40-ZS
				
Image Sensor	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/3" 4MP CMOS
Focal Length	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized
FOV-H	97°~31°	105°~33°	105°~33°	97°~31°
Min. Illumination	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)
Day/Night	ICR	ICR	ICR	ICR
WDR	DWDR	DWDR	DWDR	DWDR
Max.IR Distance	40m(131ft)	40m(131ft)	40m(131ft)	40m(131ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)	4MP(2560x1440)
Frame Rate	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP	20fps@4MP 30fps@3MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°
Compatibility	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G	ONVIF profile S&G, API
Ingress Protection	IP67	IP67	IP67	IP67
Working Temperature	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)
Power	DC12V, PoE (802.3af)(Class 0) Max. 6.3W	DC12V, PoE (802.3af)(Class 0) Max. 6.0W	DC12V, PoE (802.3af)(Class 0) Max. 6.0W	DC12V, PoE (802.3af)(Class 0) Max. 6.3W

NETWORK CAMERAS

	Vari-Focal Turret		Vari-Focal Dome		
Model	IPC-T2B20-ZS	IPC-T2B20-L-ZS	IPC-D2B40-ZS	IPC-D2B20-ZS	IPC-D2B20-L-ZS
					
Image Sensor	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS
Focal Length	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized	2.8~12mm/F1.8, Motorized
FOV-H	105°~33°	105°~33°	97°~31°	105°~33°	105°~33°
Min. Illumination	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)	0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)
Day/Night	ICR	ICR	ICR	ICR	ICR
WDR	DWDR	DWDR	DWDR	DWDR	DWDR
Max.IR Distance	40m(131ft)	40m(131ft)	30m(98ft)	30m(98ft)	30m(98ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	1080P(1920x1080)	1080P(1920x1080)	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)
Frame Rate	30fps@1080P	20fps@1080P 30fps@1.3MP	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°
Compatibility	ONVIF profile S&G	ONVIF profile S&G	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G
Ingress Protection	IP67	IP67	IP67	IP67	IP67
Working Temperature	-30°C~-60°C(-22°F ~ +140°F)	-30°C~-60°C(-22°F ~ +140°F)	-30°C~-60°C(-22°F ~ +140°F)	-30°C~-60°C(-22°F ~ +140°F)	-30°C~-60°C(-22°F ~ +140°F)
Power	DC12V, PoE (802.3af)(Class 0) Max. 6.0W	DC12V, PoE (802.3af)(Class 0) Max. 6.0W	DC12V, PoE (802.3af)(Class 0) Max. 6.5W	DC12V, PoE (802.3af)(Class 0) Max. 6.0W	DC12V, PoE (802.3af)(Class 0) Max. 6.0W

NETWORK CAMERAS

	Fixed Mini-Bullet			Fixed Turret		
	IPC-B1B40	IPC-B1B20	IPC-B1B20-L	IPC-T1B40	IPC-T1B20	IPC-T1B20-L
Model						
Image Sensor	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS
Focal Length	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0
FOV-H	101°/80°	115°/87.5°	115°/87.5°	101°/80°	115°/87.5°	115°/87.5°
Min. Illumination	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Max.IR Distance	30m(98ft)	30m(98ft)	30m(98ft)	30m(98ft)	30m(98ft)	30m(98ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)
Frame Rate	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360° Tilt: 0°~90° Rotation: 0°~360°
Compatibility	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67
Working Temperature	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)
Power	DC12V, PoE (802.3af)(Class 0) Max. 4.2W	DC12V, PoE (802.3af)(Class 0) Max. 4.2W	DC12V, PoE (802.3af)(Class 0) Max. 4.2W	DC12V, PoE (802.3af)(Class 0) Max. 4.8W	DC12V, PoE (802.3af)(Class 0) Max. 4.8W	DC12V, PoE (802.3af)(Class 0) Max. 4.8W

NETWORK CAMERAS

	Indoor Fixed Mini-Dome			Fixed Mini-Dome		
Model	IPC-D1B40	IPC-D1B20	IPC-D1B20-L	IPC-D2B40	IPC-D2B20	IPC-D2B20-L
						
Image Sensor	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/3" 4MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS
Focal Length	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0
FOV-H	101°/80°	115°/87.5°	115°/87.5°	101°/80°	115°/87.5°	115°/87.5°
Min. Illumination	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Max.IR Distance	20m(65ft)	20m(65ft)	20m(65ft)	30m(98ft)	30m(98ft)	30m(98ft)
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Max. Resolution	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)	4MP(2560x1440)	1080P(1920x1080)	1080P(1920x1080)
Frame Rate	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP	20fps@4MP 30fps@3MP	30fps@1080P	20fps@1080P 30fps@1.3MP
Multi-streaming	2 streams	2 streams	2 streams	2 streams	2 streams	2 streams
Pan/Tilt/Rotation	Pan: 0°~355° Tilt: 0°~70° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~70° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~70° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°
Compatibility	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G	ONVIF profile S&G, API	ONVIF profile S&G	ONVIF profile S&G
Ingress Protection	--	--	--	IP67	IP67	IP67
Working Temperature	-20°C~+50°C(-4°F ~ +122°F)	-20°C~+50°C(-4°F ~ +122°F)	-20°C~+50°C(-4°F ~ +122°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)	-30°C~+60°C(-22°F ~ +140°F)
Power	DC12V, PoE (802.3af)(Class 0) Max. 4.2W	DC12V, PoE (802.3af)(Class 0) Max. 4W	DC12V, PoE (802.3af)(Class 0) Max. 4W	DC12V, PoE (802.3af)(Class 0) Max. 4.4W	DC12V, PoE (802.3af)(Class 0) Max. 5.1W	DC12V, PoE (802.3af)(Class 0) Max. 5.1W

NETWORK VIDEO RECORDERS

	2HDD 1U 4K&H.265 NVR	1HDD Compact 1U 4K&H.265 NVR				1HDD Smart 1U 4K&H.265 NVR
Model	NVR2B16	NVR1B08HS	NVR1B04HS	NVR1B08HS-8P	NVR1B04HS-4P	NVR1B08
						
Processor	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
IP Video Inputs	16 channel	8 channel	4 channel	8 channel	4 channel	8 channel
Max Input/Record	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps	80Mbps/80Mbps
Max Decoding	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P
Display	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA
Max HDD	2×6TB	1×6TB	1×6TB	1×6TB	1×6TB	1×6TB
RAID	--	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way	1/1, 2-way
Alarm In/Out	--	--	--	--	--	--
Ethernet	1×1000M Port	1×100M Port	1×100M Port	1×1000M Port	1×100M Port	1×100M Port
PoE	--	--	--	8 ports (IEEE802.3at/af) Max 80W	4 ports (IEEE802.3at/af) Max 50W	--
USB	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	DC12V/4A <4W(Without HDD)	DC12V/2A <4W(without HDD)	DC12V/2A <4W(without HDD)	DC48V/2A <6W(without HDD)	DC48V/1.25A <6W(without HDD)	DC12V/2A <4W(without HDD)
Intelligent Video	--	--	--	--	--	--
Features	P2P	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P	P2P

NETWORK VIDEO RECORDERS

	1HDD Smart 1U 4K&H.265 NVR		1HDD Cooper H.265 NVR			1HDD Compact 1U H.265 NVR
	NVR1B04	NVR1B04-4P	NVR1B08HC/E	NVR1B04HC/E	NVR1B04HC-4P/E	NVR1B08HS-8P/E
Model						
Processor	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU	ARM Dual Core CPU
Video Compression	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
IP Video Inputs	4 channel	4 channel	8 channel	4 channel	4 channel	8 channel
Max Input/Record	80Mbps/80Mbps	80Mbps/80Mbps	40Mbps/40Mbps	40Mbps/40Mbps	40Mbps/40Mbps	40Mbps/40Mbps
Max Decoding	1ch@8MP/4ch@1080P	1ch@8MP/4ch@1080P	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)
Display	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA
Max HDD	1x6TB	1x6TB	1x4TB	1x4TB	1x4TB	1x4TB
RAID	--	--	--	--	--	--
eSATA/Mini SAS	--	--	--	--	--	--
Audio In/Out	1/1, 2-way	1/1, 2-way	--	--	--	--
Alarm In/Out	--	--	--	--	--	--
Ethernet	1x100M Port	1x100M Port	1x100M Port	1x100M Port	1x100M Port	1x100M Port
PoE	--	4 ports (IEEE802.3at/af) Max 50W	--	--	4 ports (IEEE802.3at/af) Max 36w	8 ports (IEEE802.3at/af) Max 72w
USB	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
Power	DC12V/2A <4W(without HDD)	DC48V/1.25A <6W(without HDD)	DC12V/1.5A <2.57W (without HDD)	DC12V/1.5A <2.57W (without HDD)	DC48V/1.25A <3.61W (without HDD)	DC48V/2A <4.29W (without HDD)
Intelligent Video	--	--	--	--	--	--
Features	P2P	Plug & Play,P2P	P2P	P2P	Plug & Play, P2P	Plug & Play, P2P

4CH 1080P H.265 IP KIT				
Model	EZIP-KIT/NVR1B04HC-4P/E-1T/4-B1B20-L	EZIP-KIT/NVR1B04HC-4P/E/4-B1B20-L	EZIP-KIT/NVR1B04HC-4P/E-1T/4-T1B20-L	EZIP-KIT/NVR1B04HC-4P/E/4-T1B20-L
				
IPC				
Image Sensor	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS
Focal Length	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0	2.8mm/F2.0 3.6mm/F2.0
FOV-H	115°/87.5°	115°/87.5°	115°/87.5°	115°/87.5°
Min.Illumination	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/3s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/3s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/3s,30IRE) 0Lux/F2.0(IR on)	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/3s,30IRE) 0Lux/F2.0(IR on)
Day/Night	ICR	ICR	ICR	ICR
WDR	DWDR	DWDR	DWDR	DWDR
Max.IR Distance	30m(98ft)	30m(98ft)	30m(98ft)	30m(98ft)
Video Compression	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264
Max.Resolution	1080P(1920x1080)@20fps	1080P(1920x1080)@20fps	1080P(1920x1080)@20fps	1080P(1920x1080)@20fps
NVR				
IP Video Inputs	4 channel	4 channel	4 channel	4 channel
Max Input/Record	40Mbps/40Mbps	40Mbps/40Mbps	40Mbps/40Mbps	40Mbps/40Mbps
Max Decoding	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)	1ch@6MP(30fps)/4ch@1080P(25fps)
Display	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA
Max HDD	1x4TB	1x4TB	1x4TB	1x4TB
Ethernet	1x100M Port	1x100M Port	1x100M Port	1x100M Port
PoE	4 Ports(IEEE802.3at/af) Max 36W	4 Ports(IEEE802.3at/af) Max 36W	4 Ports(IEEE802.3at/af) Max 36W	4 Ports(IEEE802.3at/af) Max 36W
Accessories				
Built-in HDD	1x1TB(SkyHawk Lite)	--	1x1TB(SkyHawk Lite)	--
Ethernet Cables	4x18.3m/60ft	--	4x18.3m/60ft	--

ACCESSORIES

Testers		Power Adapters	
Model	PFM900-E	PFM907	DC Power
Appearance			
Description	For IPC, HDCVI, TVI, AHD analog camera TDR, analog video generator Digital multimeter data monitor PoE+, DC12V/2A output	For IPC, HDCVI, TVI, AHD, CVBS camera Wifi test, network cable test Digital multimeter, OPM, data monitor Analog video generator PoE+, DC12V/2A, USB5V/2A output	AC90~264V input DC12V, 1A output -10°C~+55°C CE/FCC/UL/CCC

SD Cards	HDDs	
Model	PFM110/111/112/113	ST1000VX008/ST2000VX007
Appearance		
Description	Brand: Dahua Property/Speed: Class 10 (reading: 90MB/s, writing: 20MB/s) Storage capacity: 16/32/64/128GB	Form Factor: 3.5-inch Storage capacity: 1TB/2TB # of cameras supported: 1-16 Workload Rating: 120TB/yr Limited Warranty: 3 years

Cables			
Model	PFM972 Series	PFM920I Series	PFM923I Series
Appearance			
Description	UTP CAT5E/6 Patch Cord Conductor: OFC Jacket: PVC Color: yellow Length: 1m/2m/3m (3.28ft/6.56ft/9.84ft)	UTP CAT5E/6 Cable Conductor: OFC Jacket: PVC(CPR/UL) Color: white Length: 305m(1000.7ft)	UTP CAT5E/6 Cable Conductor: OFC Jacket: LSZH(CPR) Color: white Length: 305m(1000.7ft)

ACCESSORIES

EZ-IPC-B1BXX Series						
						
Model	PFA12A(plastic)	PFA130-E	PFA134	PFA134+PFA152-E	PFA134+PFA151	
Mount	Junction box			Pole mount	Corner mount	

EZ-IPC-B2BXX-ZS Series						
						
Model	PFA12A(plastic)	PFA135	PFA130-E	PFA130-E+PFA152-E	PFA130-E+PFA151	
Mount	Junction box			Pole mount	Corner mount	

EZ-IPC-T1BXX Series						
						
Model	PFA136	PFA130-E	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C	PFB203W+PFA151
Mount	Junction box		Wall mount	Pole mount	Ceiling mount(extensible)	Corner mount

ACCESSORIES

EZ-IPC-T2BXX-ZS Series						
						
Model	PFA137	PFA130-E	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C	PFB203W+PFA151
Mount	Junction box		Wall mount	Pole mount	Ceiling mount(extensible)	Corner mount

EZ-IPC-D1BXX Series				
				
Model	PFA130-E	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C
Mount	Junction box	Wall mount	Pole mount	Ceiling mount(extensible)

EZ-IPC-D2BXX(-ZS) Series					
					
Model	PFA137	PFB203W	PFB203W+PFA152-E	PFA106+PFB220C	PFA200W
Mount	Junction box	Wall mount	Pole mount	Ceiling mount(extensible)	Rain shade

ENABLING A SAFER SOCIETY AND SMARTER LIVING

Dahua USA Tel: +1 (949) 679-7777 Email: sales.usa@dahuatech.com support.usa@dahuatech.com	Dahua Argentina Email: project.ar@dahuatech.com	Dahua S.Korea Tel: +82 7081618889 Email: sales.kr@dahuatech.com support.kr@dahuatech.com	Dahua Italy Tel: +39 3703446609 Email: sales.italy@dahuatech.com	Dahua Hungary Tel: +36 17899852 Email: sales.hu@dahuatech.com
Dahua Mexico Tel: +52 55 67231936 Email: sales.mx@dahuatech.com support.mx@dahuatech.com	Dahua Panama Email: sales.pa@dahuatech.com Support: support.pa@dahuatech.com	Dahua India Tel: +91 1244569100 Email: sales.india@dahuatech.com	Dahua Germany Tel: +49 211 20544121 Email: sales.de@dahuatech.com	Dahua Bulgaria Tel: +35929950013 Email: support.bg@dahuatech.com
Dahua Colombia Tel: +571 7446110 Email: sales.co@dahuatech.com support.co@dahuatech.com	Dahua Thailand Tel: +66 2541 5188 Email: info.th@dahuatech.com hr.th@dahuatech.com	Dahua Russia Tel: 8 (499) 682-60-00 Email: info@dahuatech.com	Dahua France +33 1 48 53 70 53 Email: sales.france@dahuatech.com	Dahua SRL Email: marketing.ro@dahuatech.com
Dahua Brazil Tel: +55 11 32511871 Vendas: comercial.br@dahuatech.com Suporte Técnico: suporte.br@dahuatech.com	Dahua Singapore Tel: +65 65380952 Email: sales.sg@dahuatech.com	Dahua Kazakhstan Tel: +7 727 3110838 Email: sales.kz@dahuatech.com	Dahua CEE & Nordic Tel: +48 223957400 Email: dh.cen@dahuatech.com	Dahua Czech Tel: +420 225 986 001 Email: admin.cz@dahuatech.com
Dahua Perú Tel: +511 500-8555 Email: sales.pe@dahuatech.com support.pe@dahuatech.com	Dahua Turkey Email: sales.tr@dahuatech.com support.tr@dahuatech.com	Dahua UK Tel: +44 (0) 1628 673 667 Email: sales.uk@dahuatech.com	Dahua Poland Tel: +48 223957400 Email: biuro.pl@dahuatech.com	Dahua S. Africa Email: sales.za@dahuatech.com
Dahua Chile Tel: +56 232705421 Email: sales.cl@dahuatech.com support.chile@dahuatech.com	Dahua Malaysia Tel: +60376620731 Email: sales.my@dahuatech.com	Dahua the Netherlands Tel: +31 (0) 79 799 96 96 Email: sales.benelux@dahuatech.com	Dahua SRB +38 1 (11) 4429999 Email: dh.srb@dahuatech.com	Dahua Australia Tel: +61 299285200 Email: sales.oc@dahuatech.com
	Dahua Indonesia Email: sales.id@dahuatech.com support.id@dahuatech.com	Dahua Iberia Tel: +34 917649862 Email: sales.iberia@dahuatech.com	Dahua Denmark Email: Nordic.ne@dahuatech.com	Dahua Middle East Tel: +971 48815300 Email: sales.me@dahuatech.com info.me@dahuatech.com

* Design and specifications are subject to change without notice.

EZ-IP PRODUCT - 03, Oct. 2018



DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053
Tel: +86-571-87688883 Fax: +86-571-87688815
Email: overseas@dahuatech.com
www.dahuasecurity.com



© Dahua Technology, All rights reserved