



## ECW Series Access Points



# EnGenius Cloud Access Points Series

Optimal Performance, Enterprise Features, & Cloud Management

The EnGenius Cloud Access Point Series brings the industry's most advanced features for quick deployment and holistic management. EnGenius provides cloud managed access points for indoor and outdoor deployments. This AI-driven cloud solution is designed to increase wireless networking efficiency and reduce operating costs for small and medium-sized businesses, and empowers IT managers to rapidly implement IT initiatives to achieve their organizational objectives.

**Easy deployment** – Cloud-managed access points for indoors consist of an indoor wall plate and ceiling-mount, while outdoor models are built to withstand difficult outdoor environments. Both indoor and outdoor models are highly flexible to meet the needs of distributed networks across multiple sites and scalable with company growth.

**Smart Management** – EnGenius Cloud's predictive artificial intelligence and access point data collection helps administrators improve network performance and prevent potential issues. The cloud-based solution allows you to manage the firmware and update network policy remotely for distributed clusters of access points based on region, time zone, and other configuration.

**Visualized Analytics** – With AI-driven cloud computing, the complex data generated by your networks is aggregated into a centralized, easy-to-navigate visual interface with comprehensive statistical tools and management controls. Minimize potential issues by setting up event-based alerts and receive push notifications through the EnGenius Cloud app.

### Features & Benefits

- Supports standards up to 802.11ax and backward-compatible with 11ac/a/b/g/n
- Dual-radio MU-MIMO improves performance, expands capacities
- Versatile 4x4 and 2x2 11ax & 11ac Wave 2 models with internal & detachable antennas
- Flexible secure authentication options for guest Wi-Fi access
- Real-time system metrics, deep-dive analytics, and remote configuration
- Advanced view displays network topology with devices and relationships
- Flexible operation modes: AP, Mesh, and AP Mesh
- The Cloud manages unlimited number of AP's from anywhere with the EnGenius Cloud app



ECW 115




ECW 120



ECW 220



ECW 230

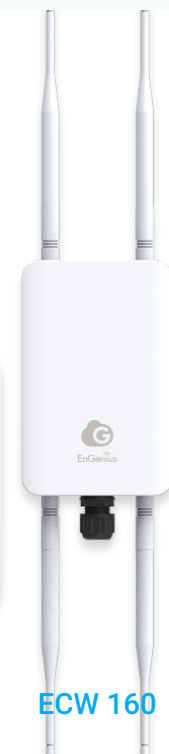

ECW 160


## Benefits to Help Grow Your Business

### Overview of Access Points Status

The EnGenius Cloud dashboard provides a big-picture view of your network status. The dashboard captures the health status of access points, collects analytics data including network connection status and real-time traffic, and highlights the most used access points, SSID's, clients and applications.

### Monitor and Troubleshoot with the Client Timeline

The client timeline pulls up an entire device's history to allow for tracing of potential problems at their source. It provides additional information about issues by analyzing the authentication process between devices, such as a smartphone and wireless access points.

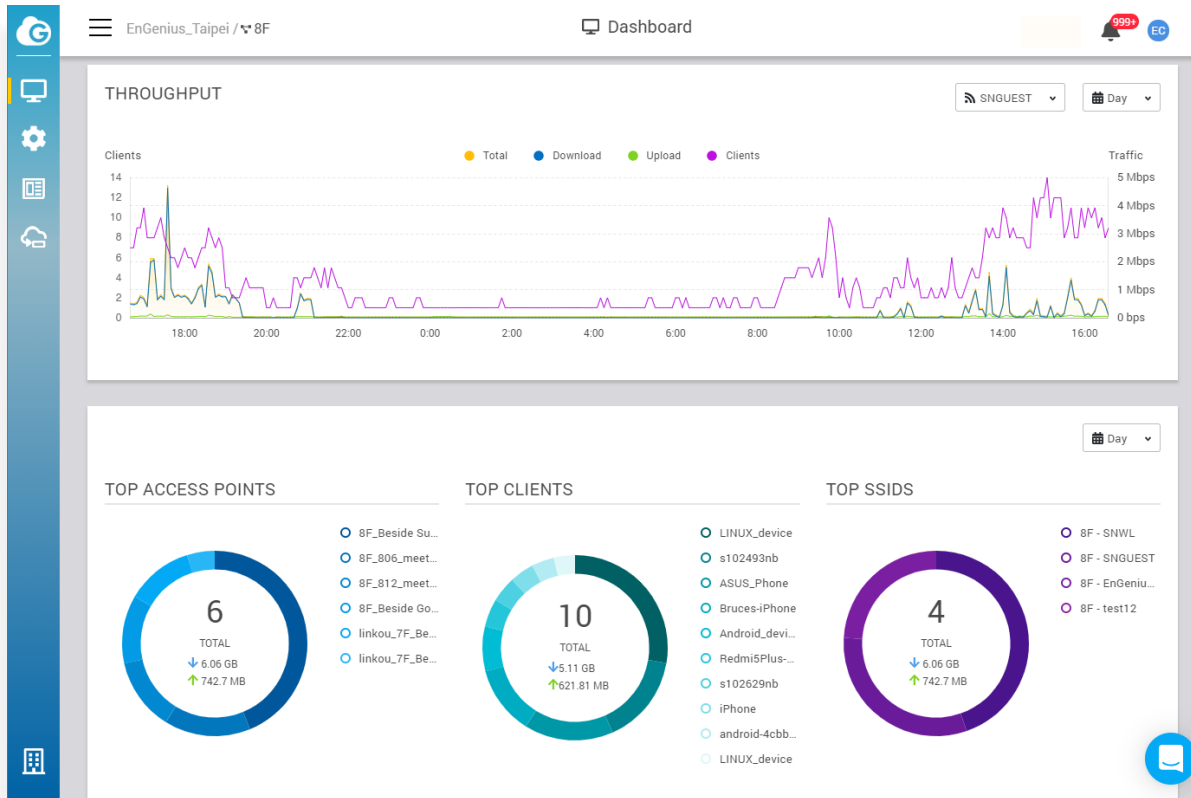


### Pinpoint Issues with the AI-Driven Advisory Board

The EnGenius Cloud advisory board uses artificial intelligence to continuously analyze your networks and report potential problems. You can customize notifications to be sent for any identified abnormal situation in your network devices, which will include recommended best responses to common issues derived from EnGenius machine learning and research.

### Network Management and Monitoring On the Go

With the EnGenius Cloud mobile app, you can have full control of cloud managed access points and devices. It offers highly customizable and real-time notifications to help you stay alert to all issues when they first arise. By using the EnGenius Cloud app, businesses can easily create a network and configure access points from any location.

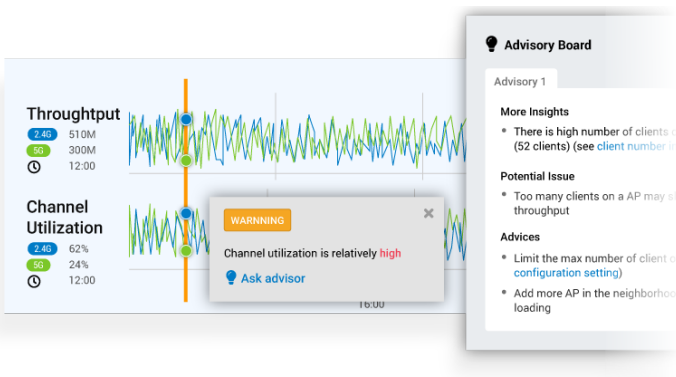

### User Authentication for Secure Guest Networks

EnGenius Cloud offers various authentication methods for different business requirements. You can configure the AAA authentication all on the cloud or from a customer's RADIUS server, create a guest Wi-Fi connection with preset access, or let users log in by linking to their social account. Organizations offering Internet access to patrons or visitors can create a secure guest network that blocks access to main corporate computers. By creating separate Virtual LANs, organizations increase security, network reliability, and conserve bandwidth.

## Quick Access to Access Point insights

EnGenius Cloud manages all devices in from a single centralized interface. The access points list offers you a summary of the most important current traffic usage data, such as radio configurations and IP settings. In addition to configuration changes, the list view allows administrators to drill down into details of specific access points to check overall configurations, real-time system meters, radio configuration and IP settings for initial setup, monitoring and troubleshooting.

The screenshot displays a table of access points with columns for Name, MAC, Model Name, Channel, WAN IP, and LAN IP. Below the table, a detailed view for a selected access point (ECW120\_12AB3) is shown. This view includes:

- Summary:** Online status, 10 Clients, 0 Bytes Download, 0 Bytes Upload.
- Throughput:** A line graph showing network activity over time.
- Channel Utilization:** A line graph showing channel usage over time.
- Radio Settings:** Configurations for 2.4G and 5G channels, including Tx Power and Channel Width.
- WLAN Settings:** SSID (SNGUEST), Status (Enable/Hide), and Disabled checkbox.
- Location:** A map showing the physical location of the access point.
- Apply Button:** A button to save the configuration changes.

## Supervise Access Points with Real-Time Metrics

EnGenius Cloud management can break down an access point's key performance diagnostics such as CPU, memory utilization, and throughput to determine the root cause of a current network problem.

The screenshot shows the 'Realtime Meters' section for an access point. It includes:

- CPU:** A line graph showing CPU usage at 45%.
- Memory:** A line graph showing memory usage at 71%.
- Throughput (2.4G / bps):** A line graph showing throughput with a current value of 230 and a target of 800.
- Throughput (5G / bps):** A line graph showing throughput with a current value of 230 and a target of 800.

Below the graphs, there is a table of SSID information with columns for #, SSID, Radio, Security, Captive Portal, and Client in 5 mins.





## Access Points Locations and Wi-Fi Strength with Floor Plan

The included Wi-Fi site survey tool accepts an upload of your floor plan and simulates Wi-Fi coverage with a heat map of your desired Tx power, RSSI value, and channel. It is capable of factoring in physical obstacles and other impediments to coverage in its forecast.

The screenshot displays the 'Floor Plans' section of the Wi-Fi site survey tool. It features:

- Heat Map:** A color-coded floor plan showing Wi-Fi signal strength across the area.
- AP List:** A table listing the access points with their status and names (e.g., 9F\_ECW120\_1 through 9F\_ECW120\_6).
- Navigation:** Buttons for List, Map, Floor Plans, Building, Zone, Layer, Ruler, and Helpmap.

## EnGenius Cloud Access Points

	Indoor				Outdoor
					
Models	ECW115	ECW120	ECW220	ECW230	ECW160
Standards	802.11a/b/g/n/ac	802.11a/b/g/n/ac	802.11a/b/g/n/ac/ax	802.11a/b/g/n/ac/ax	802.11a/b/g/n/ac
Frequency	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz
2.4 GHz Max. Data Rate	400 Mbps	400 Mbps	574 Mbps	1,148 Mbps	400 Mbps
5 GHz Max. Data Rate	867 Mbps	867 Mbps	1,200 Mbps	2,400 Mbps	867 Mbps
Radio Chains/Streams	2 x 2:2	2 x 2:2	2 x 2:2	4 x 4:4	2 x 2:2
RF Output Power (2.4 GHz)	17 dBm	23 dBm	20 dBm	23 dBm	23 dBm
RF Output Power (5 GHz)	17 dBm	23 dBm	20 dBm	23 dBm	23 dBm
Ethernet Ports	2 x 10/100/1000 Ethernet Ports (PoE) 1 x 10/100/1000 Ethernet Port (PSE Out)	1 x 10/100/1000 Ethernet Port (PoE)	1 x 10/100/1000 Ethernet Port (PoE)	1 x 10/100/1000/2500 Ethernet Port (PoE+)	1 x 10/100/1000 Ethernet Port (PoE)
Power-over-Ethernet	802.3af/at	802.3af	802.3af/at	802.3at	802.3af/at
Power Consumption(Peak)	11.9W	12W	12.8W	19.5W	12.6W
Integrated Antenna	2 x 3 dBi(2.4 GHz) Omni 2 x 3 dBi(5 GHz) Omni	2 x 5 dBi(2.4 GHz) Omni 2 x 5 dBi(5 GHz) Omni	2 x 3 dBi(2.4 GHz) Omni 2 x 3 dBi(5 GHz) Omni	4 x 3 dBi(2.4 GHz) Omni 4 x 3 dBi(5 GHz) Omni	2 x 5 dBi(2.4 GHz) Omni 2 x 5 dBi(5 GHz) Omni

## Technical Specifications

### Standards

#### ECW115/ECW120/ECW160

IEEE 802.11b/g/n on 2.4 GHz

IEEE 802.11a/n/ac on 5 GHz

#### ECW220/ECW230

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

Backward compatible with 802.11a/b/g/n/ac

### Antenna

#### ECW115

2 x 2.4 GHz: 3 dBi

2 x 5 GHz: 3 dBi

Integrated Omni-Directional Antenna

#### ECW120/ECW160

2 x 2.4 GHz: 5 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

#### ECW220

2 x 2.4 GHz: 3 dBi

2 x 5 GHz: 3 dBi

Integrated Omni-Directional Antenna

#### ECW230

4 x 2.4 GHz: 3 dBi

4 x 5 GHz: 3 dBi

Integrated Omni-Directional Antenna

## Technical Specifications

### Physical Interface

#### ECW115

2 x 10/100/1000 Ethernet Ports (PoE)  
1 x 10/100/1000 Ethernet Port (PSE Out; requires 802.3af power source)  
1 x DC Jack  
1 x Reset Button

#### ECW120/ECW220

1 x 10/100/1000 Ethernet Port (PoE)  
1 x DC Jack  
1 x Reset Button

#### ECW160

1 x 10/100/1000 Ethernet Port (PoE)

#### ECW230

1 x 10/100/1000/2500 Ethernet Port (PoE+)  
1 x DC Jack  
1 x Reset Button

### LED Indicators

#### ECW115

1 x Multi-color LED

#### ECW120

1 x Power  
1 x LAN  
1 x 2.4 GHz  
1 x 5 GHz  
1 x Mesh

#### ECW160/ECW220/ECW230

1 x Power  
1 x LAN  
1 x 2.4 GHz  
1 x 5 GHz

### Power Source

#### ECW115

Power-over-Ethernet: 802.3af/at Input  
IEEE 802.11e Compliant Source  
12VDC /1A Power Adapter

#### ECW120

Power-over-Ethernet: 802.3af Input  
IEEE 802.11e Compliant Source  
12VDC /1A Power Adapter

#### ECW160

Power-over-Ethernet: 802.3af/at Input  
IEEE 802.11e Compliant Source  
Active Ethernet (PoE)

#### ECW220

Power-over-Ethernet: 802.3af/at Input  
IEEE 802.11e Compliant Source  
12VDC /1.5A Power Adapter

#### ECW230

Power-over-Ethernet: 802.3at Input  
IEEE 802.11e Compliant Source  
12VDC /2A Power Adapter

### Maximum Power Consumption

#### ECW115

11.9W

#### ECW120

12W

#### ECW160

12.6W

#### ECW220

12.8W

#### ECW230

19.5W

### Wireless & Radio Specifications Operating Frequency

#### ECW115/ECW120/ECW160/ECW220/ECW230

Dual-Radio Concurrent 2.4 GHz & 5 GHz

### Operation Modes

#### ECW115/ECW120/ECW160/ECW220/ECW230

Managed mode: AP, AP Mesh, Mesh

### Frequency Radio

#### ECW115/ECW120/ECW160/ECW220/ECW230

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz

### Transmit Power

#### ECW115

Up to 17 dBm on 2.4 GHz

Up to 17 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

#### ECW120/ECW160

Up to 23 dBm on 2.4 GHz

Up to 23 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

#### ECW220

Up to 20 dBm on 2.4 GHz

Up to 20 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

#### ECW230

Up to 23 dBm on 2.4 GHz

Up to 23 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

### Tx Beamforming (TxBF)

### Radio Chains/Spatial Stream

#### ECW115/ECW120/ECW160/ECW220

2 × 2:2

#### ECW230

4 × 4:4

## Technical Specifications

### SU-MIMO

#### ECW115/ECW120/ECW160

Two(2) spatial stream Single User (SU) MIMO for up to 400 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.  
Two(2) spatial stream Single User (SU) MIMO for up to 867 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.

#### ECW220

Two (2) spatial stream Single User (SU) MIMO for up to 574 Mbps wireless data rate with HE40 bandwidth to a 2x2 wireless client device under the 2.4GHz radio.  
Two (2) spatial stream Single User (SU) MIMO for up to 1,200 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.

#### ECW230

Four (4) spatial stream Single User (SU) MIMO for up to 1148 Mbps wireless data rate with HE40 bandwidth to a 4x4 wireless client device under the 2.4GHz radio.  
Four (4) spatial stream Single User (SU) MIMO for up to 2400 Mbps wireless data rate with HE80 to a 4x4 wireless device under the 5GHz radio.

### MU-MIMO

#### ECW115/ECW120/ECW160

Two (2) Spatial Stream MU-MIMO up to 867 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO capable wireless devices under 5GHz simultaneously.

#### ECW220

Two (2) spatial streams Multiple (MU)-MIMO up to 1,200 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two (2) spatial streams Multiple (MU)-MIMO up to 574 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

#### ECW230

Four (4) spatial streams Multiple (MU)-MIMO up to 2,400 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Four (4) spatial streams Multiple (MU)-MIMO up to 1,148 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

### Supported Data Rates (Mbps):

#### ECW115/ECW120/ECW160

2.4 GHz: Max 400 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: Max 867 (MCS0 to MSC11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15) (Additional 25% bandwidth when enabling 256-QAM under HT40)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

#### ECW220

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MSC11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

#### ECW230

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MSC11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

### Supported Radio Technologies

#### ECW115/ECW120/ECW160

802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)

802.11b: Direct-Sequence Spread Spectrum (DSSS)

802.11n/ac: 2x2 MIMO with 2 Streams

#### ECW220/ECW230

802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)

802.11a/g/n/ac: Orthogonal Frequency Division Multiple (OFDM)

802.11b: Direct-sequence spread-spectrum (DSSS)

### Channelization

#### ECW115/ECW120/ECW160

802.11ac Supports Very High Throughput (VHT)—VHT 20/40/80 MHz

802.11n Supports High Throughput (HT)—HT 20/40 MHz

802.11n Supports High Throughput (HT) Under the 2.4 GHz Radio—HT 40 MHz (256-QAM)

802.11n/ac Packet Aggregation: A-MPDU, A-SPDU

#### ECW220/ECW230

802.11ax supports high efficiency throughput (HE) —HE 20/40/80 MHz

802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz

802.11n supports high throughput (HT) —HT 20/40 MHz

802.11n supports high throughput under the 2.4GHz radio —HT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

### Supported Modulation

#### ECW115/ECW120/ECW160

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

#### ECW220/ECW230

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

### Management Multiple BSSID

#### ECW115/ECW120/ECW160/ECW220/ECW230

8 SSIDs on both 2.4GHz and 5GHz bands.

### VLAN Tagging

#### ECW115/ECW120/ECW160/ECW220/ECW230

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

### Spanning Tree

#### ECW115/ECW120/ECW160/ECW220/ECW230

Supports 802.1d Spanning Tree Protocol

### QoS (Quality of Service)

#### ECW115/ECW120/ECW160/ECW220/ECW230

Complaint With IEEE 802.11e Standard

WMM

## Technical Specifications

### SNMP

#### ECW115/ECW120/ECW160/ECW220/ECW230

v1, v2c, v3

### MIB

#### ECW115/ECW120/ECW160/ECW220/ECW230

I/II, Private MIB

### Fast Roaming

#### ECW115/ECW120/ECW160/ECW220/ECW230

802.11r/k

### Wireless Security

#### ECW115/ECW120/ECW160/ECW220/ECW230

WPA2-PSK

WPA2-Enterprise

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

Https

SSH Tunnel

Client Isolation

### Environment & Physical Temperature Range

#### ECW115/ECW120/ECW220/ECW230

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-40 °C~80 °C)

#### ECW160

Operating: -4°~140°F/-20°C~60°C

Storage: -40°F~176°F/-40°C~80°C

### Humidity (non-condensing)

#### ECW115/ECW120/ECW160/ECW220/ECW230

Operating: 90% or less

Storage: 90% or less

### Dimensions & Weight

#### ECW115

Weight: 225 g

Width: 140 mm

Length: 90 mm

Height: 40 mm

#### ECW120

Weight: 362.8 g

Width: 161.5 mm

Length: 161.5 mm

Height: 41.6 mm

#### ECW160

Weight: 829.5 g

Width: 111.2 mm

Length: 173.6 mm

Height: 30.29 mm

#### ECW220

Weight: 382 g

Width: 160 mm

Length: 160 mm

Height: 33.2 mm

#### ECW230

Weight: 597 g

Width: 205 mm

Length: 205 mm

Height: 33.2 mm

### Package Contents

#### ECW115

1 – ECW115 Cloud Managed Indoor Access Point

1 – Junction Plate (short)

1 – Junction Plate (tall)

1 – Mounting Screw Kit

1 – Quick Installation Guide

#### ECW120

1 – ECW120 Cloud Managed Indoor Access Point

1 – T-Rail Mounting Kit

1 – Ceiling and Wall Mount Screw Kit

1 – Mounting Bracket

1 – Quick Installation Guide

#### ECW160

1 – ECW160 Cloud Managed Outdoor Access Point

2 – Pole-Mounting Brackets

1 – Wall-Mount Screw Set

2 – 2.4GHz 5dBi SMA Antennas

2 – 5GHz 5dBi SMA Antennas

1 – Quick Installation Guide

#### ECW220

1 – ECW220 Cloud Managed Indoor Access Point

1 – Ceiling Mount Base (9/16" Trail)

1 – Ceiling Mount Base (15/16" Trail)

1 – Ceiling and Wall Mount Screw Kit

1 – Quick Installation Guide

#### ECW230

1 – ECW230 Cloud Managed Indoor Access Point

1 – Ceiling Mount Base (9/16" Trail)

1 – Ceiling Mount Base (15/16" Trail)

1 – Ceiling and Wall Mount Screw Kit

1 – Quick Installation Guide

### Compliance Regulatory

#### ECW120/ECW160/ECW220/ECW230

FCC

CE

IC


### Warranty

#### ECW120/ECW160/ECW220/ECW230


2 Year

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.

## ECW115 Indoor Access Point

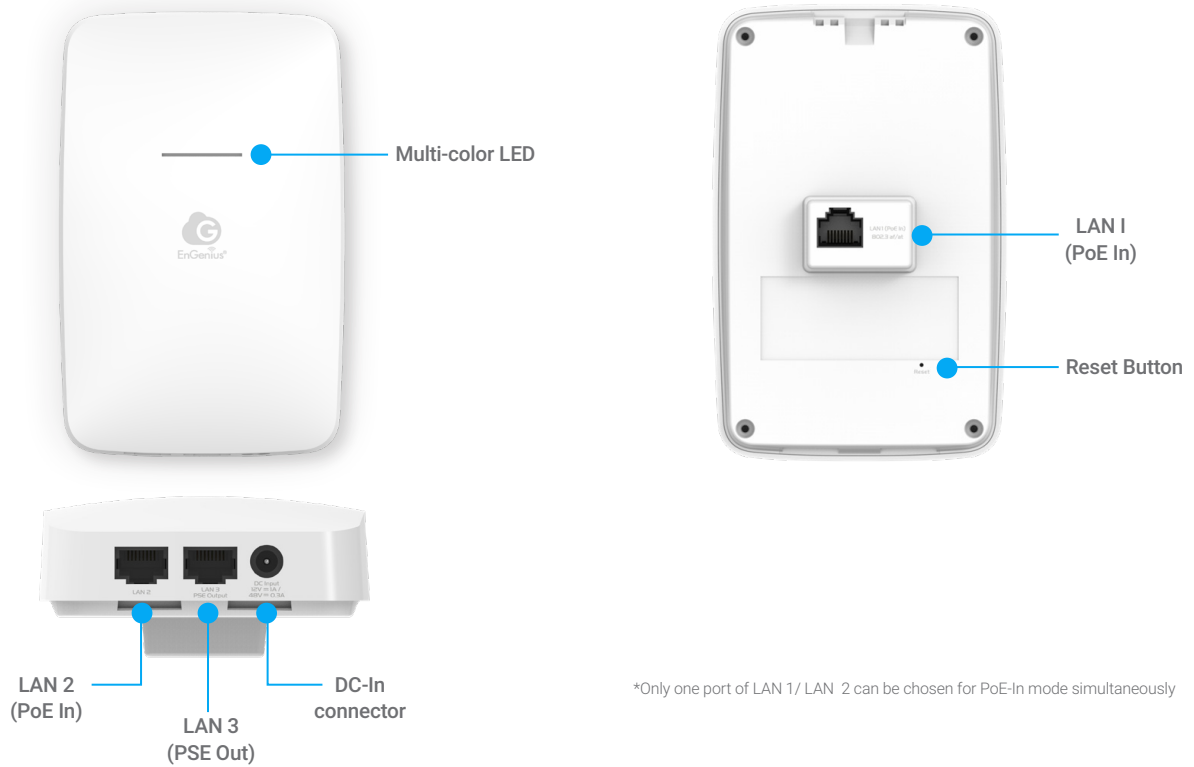


## ECW120 Indoor Access Point

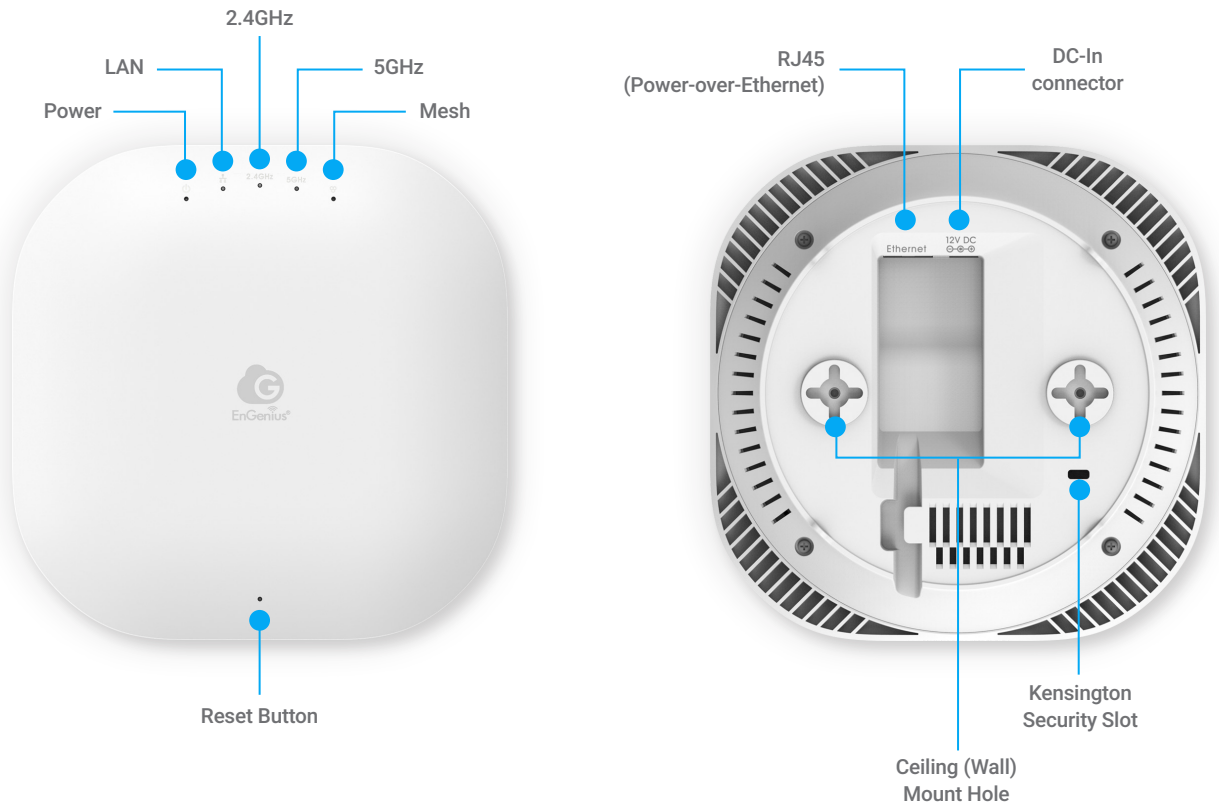




## ECW220/ECW230 Indoor Access Point

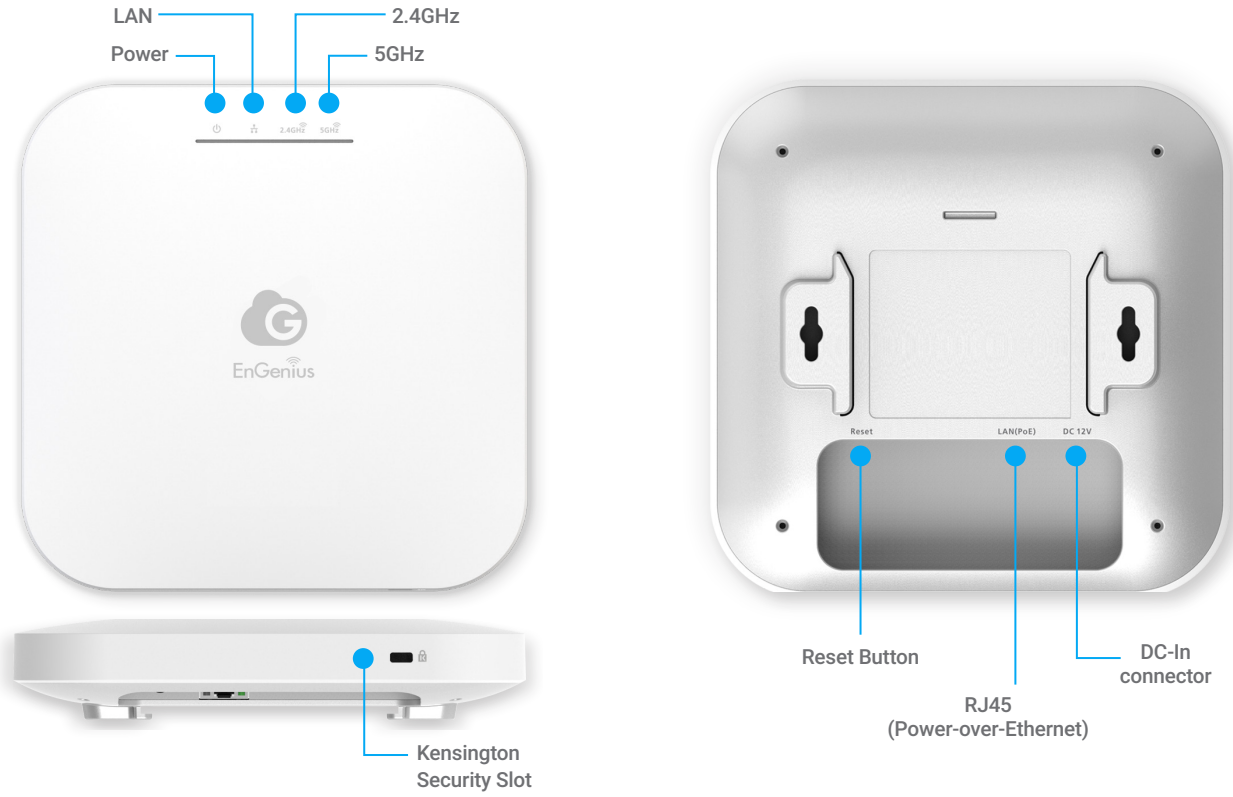

## ECW160 Outdoor Access Point

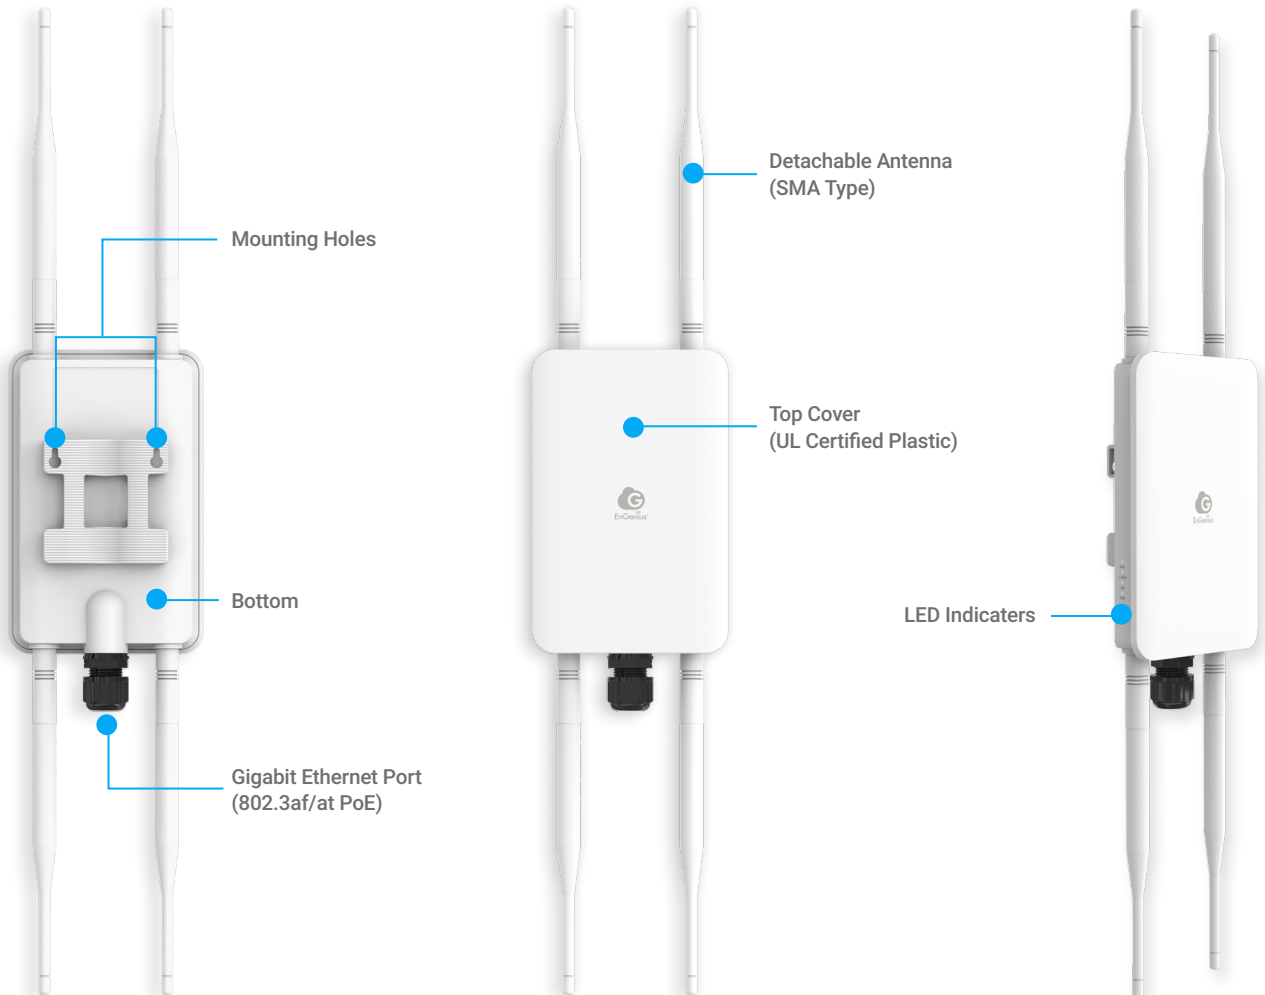

## Plug & Play with Zero Configuration



EnGenius Technologies | Costa Mesa, California, USA

Email: [partners@engeniustech.com](mailto:partners@engeniustech.com)  
Website: [www.engeniustech.com](http://www.engeniustech.com)

EnGenius Networks Europe B.V. | Eindhoven, Netherlands (Europe)

Email: [sales@engeniustech.com](mailto:sales@engeniustech.com)  
Website: [www.engeniustech.com](http://www.engeniustech.com)

EnGenius Networks Singapore Pte Ltd. | Singapore (Asia Pacific)

Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg)