


CO₂ and THPVoc sensors for Poseidon




Sensor CO₂

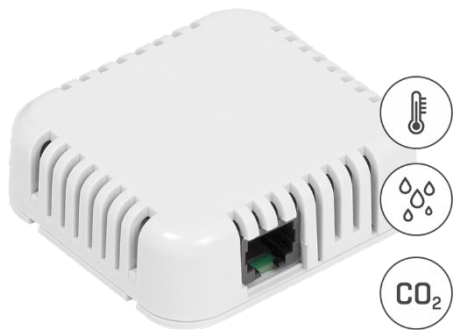


Sensor THPVoc



Temp 1Wire Pt1000



Sensor 230V AC 1W -UNI



Temp-1Wire Rack 19



Sensor 4-20 mA 1W -UNI

CO₂ and THPVoc sensors for Ares (GSM/LTE)



Sensor CO₂



Sensor THPVoc



battery
for 24h



Temp-1Wire Rack 19



Sensor 230V AC 1W-UNI



Temp 1Wire Pt1000



HTemp-1Wire Box2

Sensor CO2 1W-UNI




- Temperature [°C]
- Relative Humidity [%RH]
- CO₂ [ppm]

Compatible with all HW group monitoring devices .

- Temperature range: 0 to +50 °C
- Humidity range: 0 - 95 %RH
- CO₂ range: 300 - 40000 ppm

Compatibility:



WiFi



LAN




GSM/LTE



NB IoT

Sensor THPVoc 1W-UNI

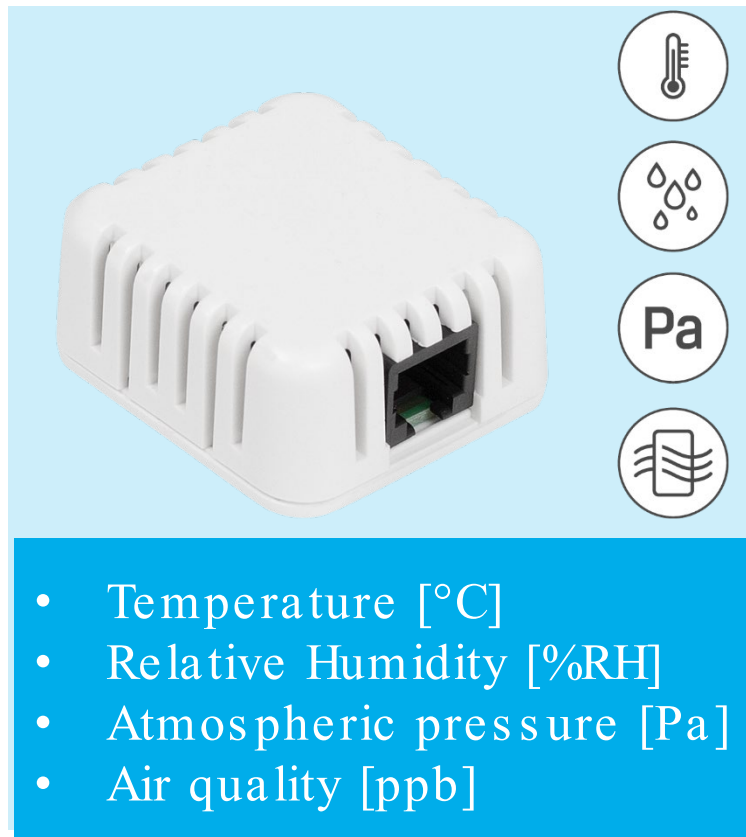

Compatible with all HW group monitoring devices .

- Temperature range: -30 to +70 °C
- Humidity range: 0 - 100% RH
- Atmospheric range: 30000 to 110000 Pa
- Air quality range: 0 to 60000 ppb

Compatibility:



WiFi



LAN



GSM/LTE



NB IoT

New Environmental sensors with RJ11 interface



Temp HomeBox



Sensor CO₂



HTemp HomeBox



Sensor THPVoc



WiFi



NB IoT




LAN



GSM/ LTE

Example of connection STE2 r2 with RJ11 sensors

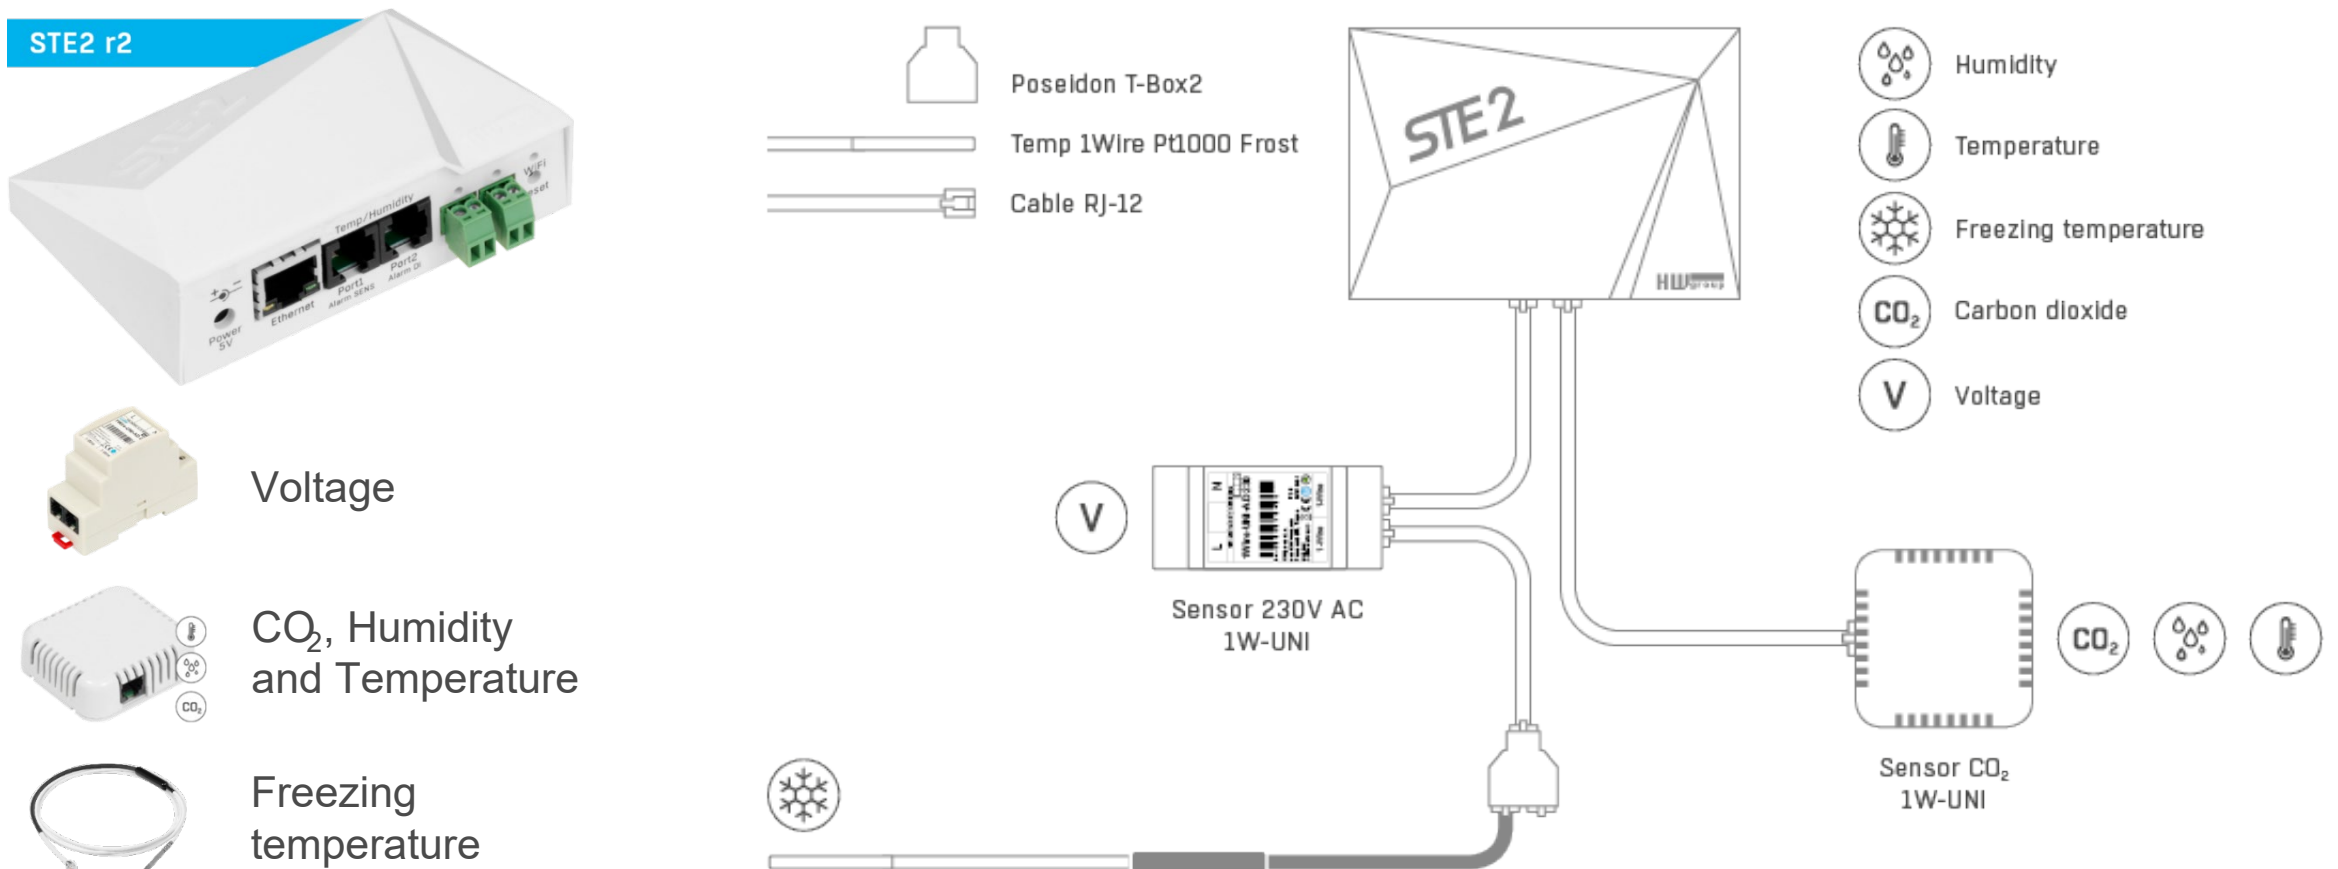

Ares 10 GSM/ LTE: 6 sensor value now supported



°C , %RH, ppm




°C , %RH, Pa, ppb



°C , %RH



°C

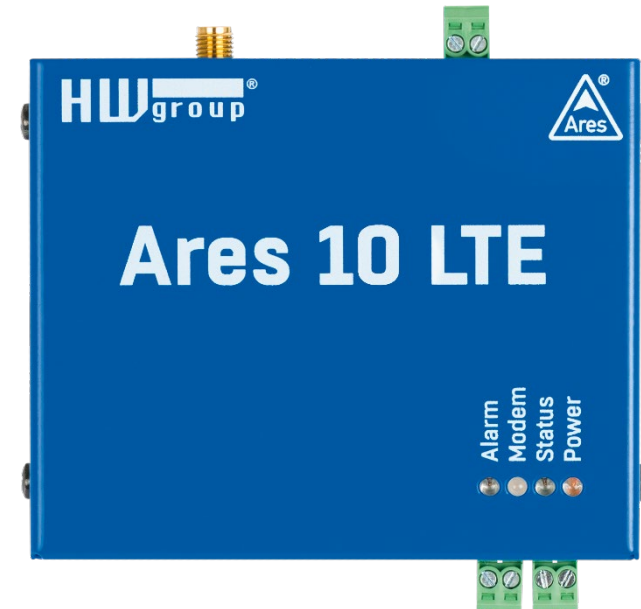

New compatible
sensors available

Ares 10 GSM/ LTE: 3»6 sensor values upgrade



6 sensor values
can be connected now

