



ENH1350EXT

11ac Wave 2 Outdoor Dual-Band Wireless Access Point

Extend your high-speed wireless coverage to the outdoors with the high-powered **ENH1350EXT**, an 11ac Wave 2, MU-MIMO, Dual-Band Wireless AC1300 Outdoor Access Point. Reaching speeds to 867 Mbps on the 5 GHz and 400 Mbps on the 2.4 GHz frequency band, this feature-rich AP leverages advanced Wi-Fi and Beamforming antenna technology, maximizing performance and increasing outdoor or indoor network capacities. The AP is designed to operate in harsh environmental conditions and includes an IP67-rated weatherproof housing.

The ENH1350EXT is easy to install in virtually any location with its included PoE adapter for quick deployment regardless of its proximity to power outlets. The AP is an ideal wireless solution for indoor and outdoor residential and commercial applications.

Features

- Wave 2 MU-MIMO Improves Performance & Expands User Capacities
- IP67-Rated Waterproof & Dustproof Housing Withstands Harsh Environments
- 11ac Dual-Radio Speeds to 867 Mbps on 5 GHz; to 400 Mbps on 2.4 GHz
- Beamforming Optimizes Antenna Signal, Reception & Reliability
- Four (4) External 5dbi High-Gain, 360° SMA-Type Antennas
- Band Steering Optimizes Network Traffic Flow ; Fast Roaming Secures Seamless Connections
- Flexible Operation Modes: AP, Client Bridge or WDS
- Quickly View, Monitor & Reconfigure APs Locally or Remotely with EZ Controller™ Software

Ideal for:

- Restaurants & Cafes
- Outdoor Living Areas
- Retail Complexes
- Resort Properties
- Campgrounds & RV Parks
- Marinas & Docks
- Trucking & Transportation Centers
- Golf Courses & Regional Parks
- Ranches & Farms
- Warehouse Facilities




Exceptional Performance in Harsh Outdoor Climates

Designed for peak performance in harsh climates, the ENH1350EXT features an IP67-rated weatherproof and dustproof enclosure ensuring it can withstand harsh outdoor and indoor environments where the temperature is a factor.



Higher Speeds for Multi-User Support

The ENH1350EXT offers the next generation of 11ac Wave 2 speed and performance for wireless access points by increasing speeds and capacities. Support the newest 11ac Wave 2 Multi-User MIMO (MU-MIMO) smartphones, laptops, and other mobile devices with AC1300 network speeds for bandwidth-heavy applications. Multi-MIMO sends multiple streams to several devices simultaneously expanding the total bandwidth and capacity of the network.

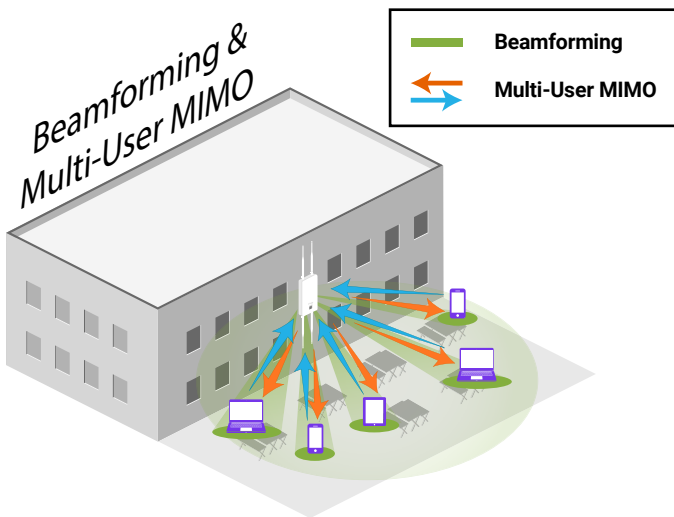


11ac Wave 2: Future Proof, Crowd Proof Networks

The ENH1350EXT allows administrators to utilize the most advanced Wi-Fi technology standard available while supporting the future of mobile technology for their users. The AP handles crowded outdoor client environments through its two spatial, MU-MIMO streams and Beamforming technology, which targets signals directly to devices, providing optimal signal and reception reliability for users.

Powerful Connectivity Indoors and Out


The ENH1350EXT is powerful enough to provide Wi-Fi connectivity approximately 3,000 square feet while its small footprint makes it flexible for both indoor and outdoor use. Place the AP near an exterior wall indoors and blanket both indoor and outdoor living areas with its wireless signal.

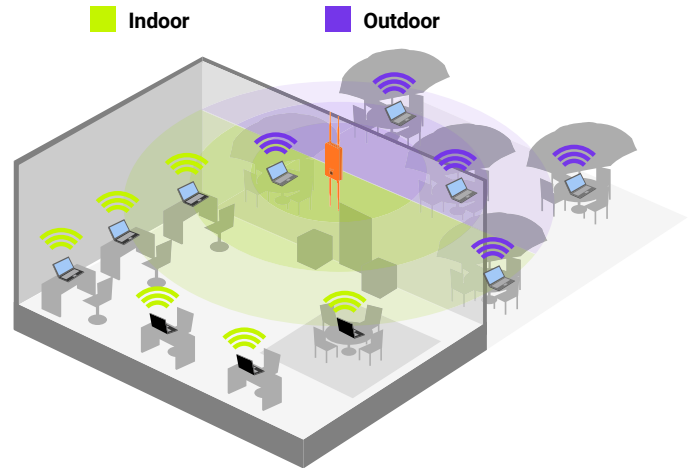

Fast Roaming & Secure Guest Network Features Improve the Customer Experience

Configure multiple APs for Fast Roaming (802.11r & 802.11k); ensuring client authentication occurs seamlessly before client devices move to the next AP, providing continuous connectivity for devices in motion with fast, secure roaming.

Establish Guest Networks to limit Internet resources for visitors while securing the network from sophisticated Trojans and malware that can use guest's mobile devices to attack the network.

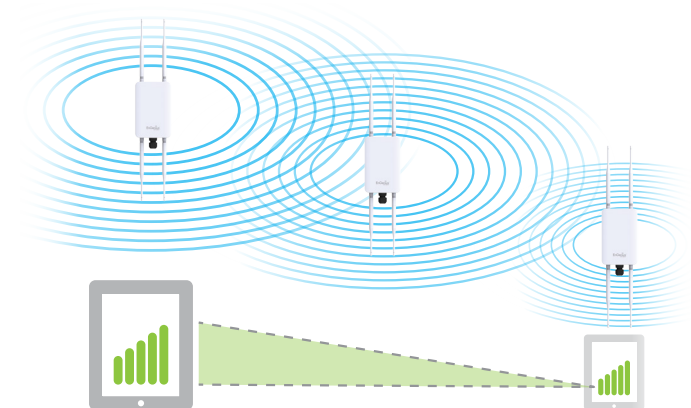

Product Specifications

Technical Specifications
Standards
IEEE 802.11b/g/n on 2.4 GHz
IEEE802.11a/n/ac on 5 GHz
Antenna
Four (4) External 5 dBi Dual-Concurrent Omni-Directional Antennas
SMA-Type
Physical Interface
1 x 10/100/1000 Gigabit Ethernet Port
1 x Reset Button
LED Indicators
1 x Power
1 x LAN 1
1 x 2.4 GHz
1 x 5 GHz
Power Source
Power-over-Ethernet: Proprietary 48V PoE
IEEE 802.11e Compliant Source
Active Ethernet (PoE)
Maximum Power Consumption
12.6W
Surge Protection
1KV
ESD Protection
Contact: 4KV
Air: 8 KV
Wireless & Radio Specifications
Operating Frequency
Dual-Radio Concurrent 2.4 GHz & 5 GHz
Operation Modes
Access Point Mode (AP mode)
Client Bridge Mode (CB mode)
WDS: AP Mode and Bridge Mode
Mesh Mode (Coming Soon)
Frequency Radio
2.4 GHz: 2400 MHz ~ 2835 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
Transmit Power
2.4 GHz: 23 dBm
5 GHz: 23 dBm

Tx Beamforming (TxBF)
Radio Chains/Spatial Stream
2x2:2
SU-MIMO
Two (2) Spatial Stream SU-MIMO up to 1267 Mbps to a single client
MU-MIMO
Two (2) Spatial Stream MU-MIMO up to 1267 Mbps to two (2) MU-MIMO capable wireless devices simultaneously
Supported Data Rates (Mbps):
2.4 GHz: Max 400
5 GHz: Max 867
802.11b: 1, 2, 5.5, 11
802.11a/g: 6, 9, 12, 18, 36, 48, 54
802.11n: 6.5 to 400 Mbps (MCS0 to MCS15)
802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)
Supported Radio Technologies
802.11b: Direct-Sequence Spread Spectrum (DSSS)
802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)
802.11n/ac: 2x2 MIMO with 2 Streams
Channelization
802.11ac supports very high throughput (VHT)—VHT 20/40/80 MHz
802.11n supports high throughput (HT)—HT 20/40 MHz
802.11n supports very high throughput (VHT) under the 2.4 GHz radio—VHT (256-QAM)
802.11n/ac packet aggregation: AMPDU, ASPDU
Supported Modulation
802.11b: BPSK, QPSK, CCK
802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Management
Multiple BSSID
Supports 16 SSIDs (8 SSIDs per band)
VLAN Tagging
Supports 802.1q SSID-to-VLAN Tagging
Cross-Band VLAN Pass-Through
Management VLAN
QoS (Quality of Service)
Complaint with IEEE 802.11e Standard

QoS (Quality of Service) Continued
Band Steering
RSSI Threshold
Traffic Shaping
Save Configuration as Default
Auto-Transmit Power
Auto-Channel Selection
Site Survey
PMK Caching
Distance Control (ACK Timeout)
Multicast Supported
Fast Roaming
Email Alerts
Wi-Fi Scheduler
Client Traffic Status
Guest Network
RADIUS Accounting
Power Save Mode (U-APSD Support)
CLI Support
SNMP
v1, v2c, v3
MIB
I/II, Private MIB
Wireless Security
WEP Encryption 64/128/152 bit
WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)
Hide SSID in Beacons
MAC Address Filtering, Up to 64 MACs per SSID
Wireless STA (Client) Connected List
Https
SSH
Client Isolation
Environment & Physical
Temperature Range
Operating: -4°~140°F/-20°C~60°C
Storage: -22°F~176°F/-40°C~80°C
Humidity (non-condensing)
Operating: 90% or less
Storage: 90% or less
Weatherproof
IP67-Rated Enclosure
Dimensions & Weights
ENH1350EXT Device
Weight: 0.65 lbs (295 g)
Width: 4.37" (111.2 mm)
Length: 6.83" (173.6 mm)
Height* 1.19" (30.29 mm)

Product Specifications continued

Package Contents

1-ENH1350EXT Dual-Band AC1300
Outdoor Access Point

1-PoE Adapter (EPA5006GR)

2-Pole Mounting Brackets

1-Wall-Mount Screw Set

2-2.4 GHz 5dbi SMA Antennas

2-5 GHz 5dbi SMA Antennas

1-Power Cord

Quick Installation Guide


Certifications

FCC, CE

Warranty:

1 Year

ENH1350EXT Outdoor Access Point

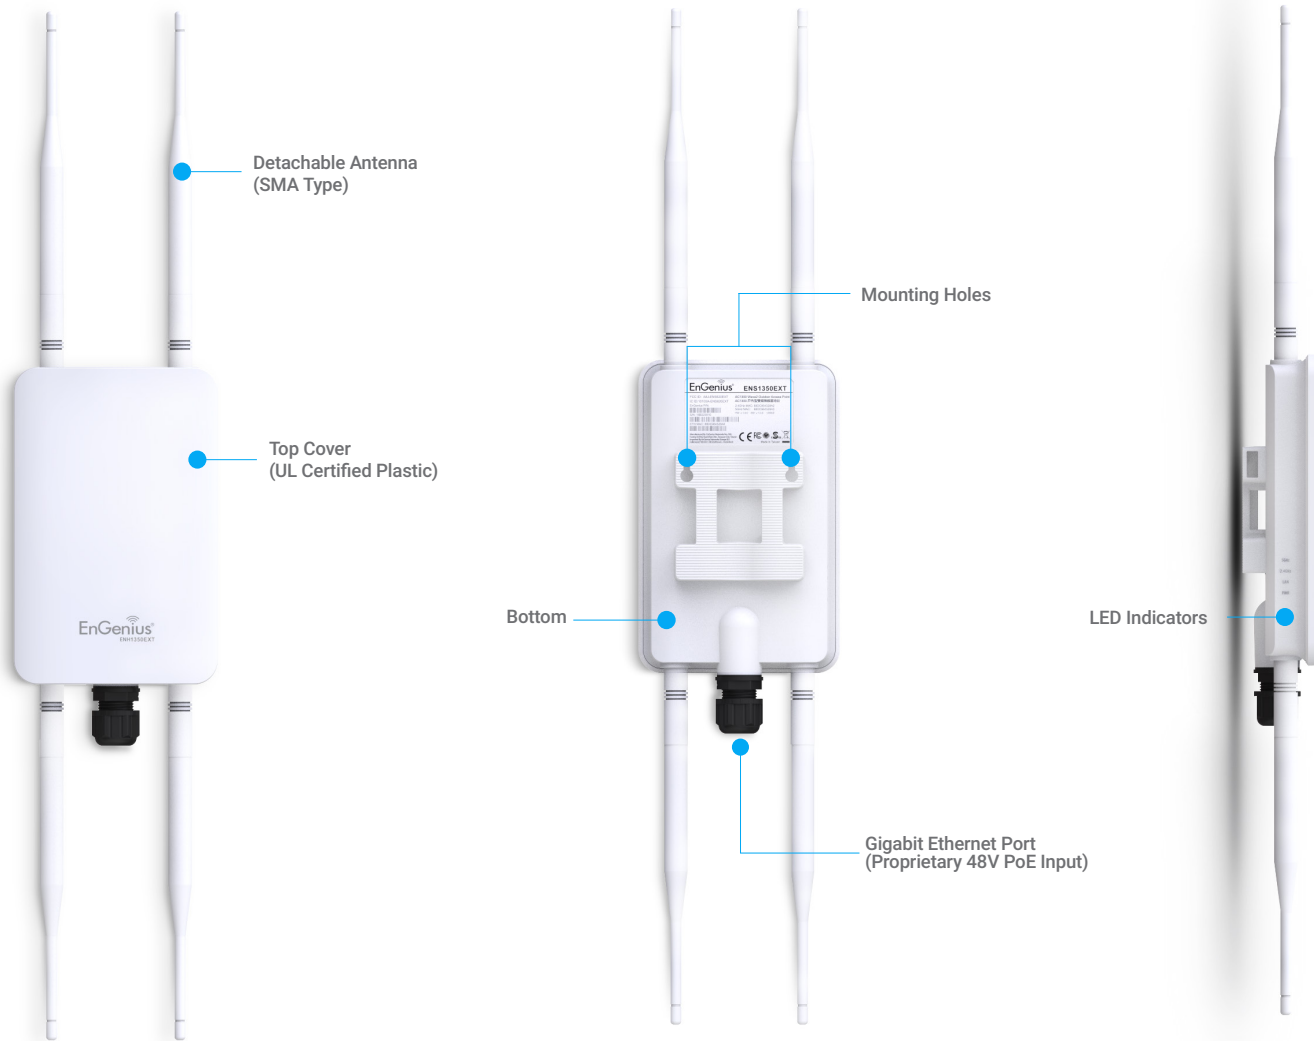

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network. Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2018 EnGenius Technologies, Inc. All rights reserved.

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: partners@engeniustech.com | Website: engeniustech.com

Version 1.02 06/26/2018

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2018 EnGenius Technologies, Inc. All rights reserved.